


Solenoid poppet valve

- 2/2-, 3/2- and 3/4-way construction
- $Q_{max} = 40 \text{ l/min}$
- $p_{max} = 350 \text{ bar}$

NG6
ISO 4401-03

DESCRIPTION

Poppet valve, flanged design NG6, available as a 2/2 or 3/2-way valve (normally open or closed) and as a 3/4-way valve (normally closed). The central functioning element of all directly controlled poppet valves in the NG6 series is the poppet valve cartridge NG6. See data sheet 1.11-2030. The solenoids correspond to VDE standard 0580.

Important: When commissioning, the valve must be vented under pressure (max. 2 revolutions of screw E).

FUNCTION

The valve is direct operated by a wet pin push type solenoid which in turn either opens or closes the poppet. The design of the poppet spool, which is equal in surface area on both sides and thus pressure balanced, means there are no undue opening and closing hydraulic forces. Due to this the oil flow through the poppet valve is possible in both directions. The valve is tight in both flow directions.

APPLICATION

Wandfluh poppet valves can be used anywhere absolutely leak tight closing functions are important. Completely sealed loading, gripping and clamping operations are all important functions which Wandfluh poppet valves can perform. Cartridge type poppet valves can be neatly accommodated in valve blocks. From a mechanical and functional point of view, poppet valves can replace slide valves at any time.

CONTENTS

GENERAL SPECIFICATIONS	1.11-2140/1
HYDRAULIC SPECIFICATIONS	1.11-2140/1
ELECTRICAL CONTROL	1.11-2140/1
SYMBOLS	1.11-2140/1
CHARACTERISTICS	1.11-2140/2
DIMENSIONS	1.11-2140/2
PARTS LIST	1.11-2140/2
ACCESSORIES	1.11-2140/2

TYPE CODE

2/2- or 3/2-way construction	A	<input type="checkbox"/>	<input type="checkbox"/>	2	06	<input type="checkbox"/>	-	<input type="checkbox"/>	#	<input type="checkbox"/>
3/4-way construction	A	<input type="checkbox"/>	3	4	06	<input type="checkbox"/>	-	<input type="checkbox"/>	#	<input type="checkbox"/>
International mounting interface ISO										
Medium	M	<input type="checkbox"/>								
Super	S	<input type="checkbox"/>								
2-way (connections)	2	<input type="checkbox"/>								
3-way (connections)	3	<input type="checkbox"/>								
2 position										
4 position										
Nominal size 6										
Normally closed, solenoid on A-side									1a	<input type="checkbox"/>
Normally open, solenoid on B-side									0b	<input type="checkbox"/>
Standard nominal voltage	12VDC	<input type="checkbox"/>	G12	110VAC	<input type="checkbox"/>	R110				
	24VDC	<input type="checkbox"/>	G24	115VAC	<input type="checkbox"/>	R115				
				230VAC	<input type="checkbox"/>	R230				

Design-Index (Subject to change)

GENERAL SPECIFICATIONS

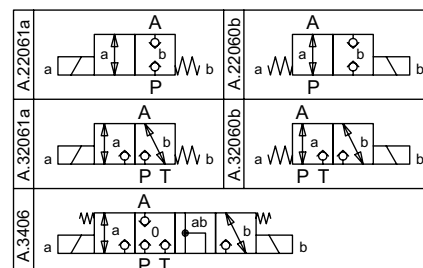
Description	2/2-, 3/2- and 3/4-way poppet valve
Nominal size	NG6 to ISO 4401-03
Construction	Direct operated poppet valve
Operations	Solenoid
Mounting	Flange, 4 holes for socket cap screws M5x45
Connections	Threaded connection plates Multi-flange subplates Longitudinal stacking system
Ambient temperature	-20...+50°C
Mounting position	any, preverable horizontal
Fastening torque	$M_D = 5,5 \text{ Nm}$ (quality 8,8)
Weight 2/2-, 3/2-way	$m = 1,8 \text{ kg}$
3/4-way	$m = 2,8 \text{ kg}$
Volume flow direction	any (see characteristics)

ELECTRICAL CONTROL

Construction	Solenoid, wet pin push type, pressure high
Standard-nominal voltage	$U_N = 12 \text{ VDC}, 24 \text{ VDC}$ $U_N = 110 \text{ VAC}^*, 115 \text{ VAC}^*, 230 \text{ VAC}^*$ AC = 50 to 60 Hz * Rectifier integrated in the plug Other nominal voltages and nominal performances on request
Voltage tolerance	±10% of nominal voltage
Protection class	IP 65 to DIN 40050
Relative duty factor	100% ED (see data sheet 1.1-430)
Switching cycles	15'000/h
Operating life (number of switching cycles)	10^7
Connection/Power supply	Over device plug connection to ISO 4400/ DIN 43650, (2P+E), other connections on request
Solenoid:	- Medium SIN45V (1.1-120) - Super SIS45V (1.1-125)

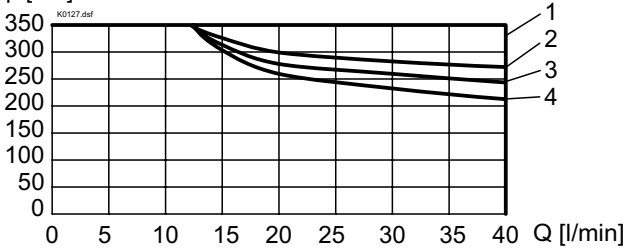
HYDRAULIC SPECIFICATIONS

Fluid	Mineral oil, other fluid on request
Contamination efficiency	ISO 4406, classe 18/14 (Required filtration grade $\beta_{10} \dots 16 \geq 75$) refer to data sheet 1.0-50/2
Viscosity range	12 mm ² /s...320 mm ² /s
Fluid temperature	-20...+70°C
Working pressure	Medium: $p_{max} = 160 \text{ bar}$ Super: $p_{max} = 350 \text{ bar}$
Max. volume flow	$Q_{max} = 40 \text{ l/min}$ see characteristics

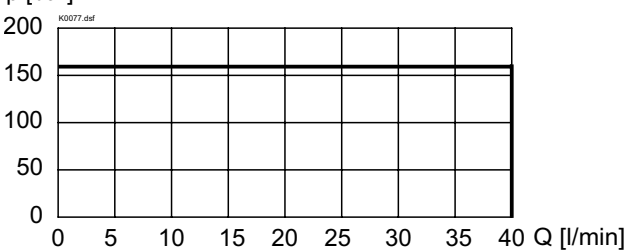
SYMBOLS


CHARACTERISTICS Oilviscosity $\nu = 30 \text{ mm}^2/\text{s}$
 $p = f(Q)$ Performance limit by standard voltage at -10 %

Super

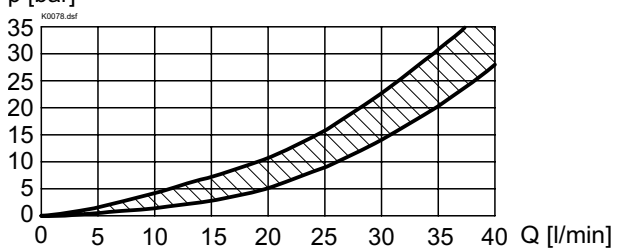
 p [bar]

 $p = f(Q)$ Performance limit by standard voltage at -10 %

Medium

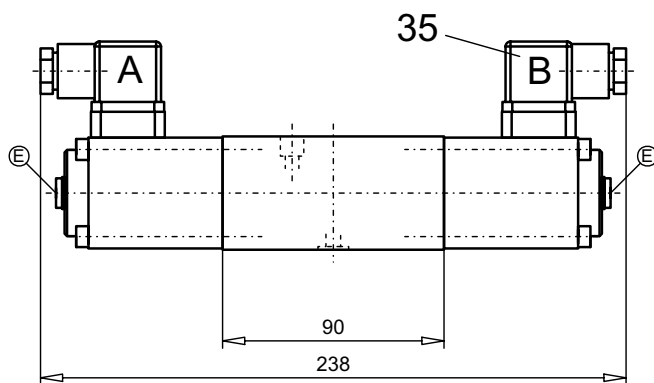
 p [bar]


Type	Flow direction			
	P - A	A - T	A - P	T - A
AS22061a	1	-	2	-
AS22060b	1	-	4	-
AS32061a	1	2	3	1
AS32060b	1	2	3	1
AS3406	1	1	2	2

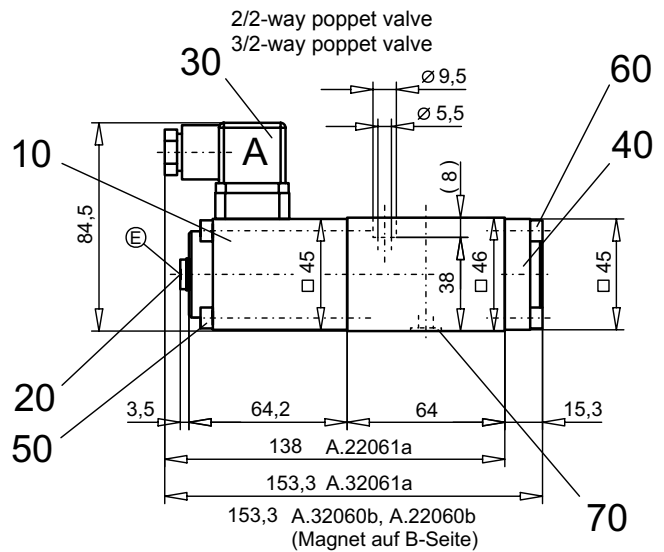
 $\Delta p = f(Q)$ Pressure loss/flow characteristics

 p [bar]

DIMENSIONS

3/4-way poppet valve



E = air bleed screw


PARTS LIST

Position	Article	Description
10	260.6... 260.7...	Medium-solenoid SIN45V Super-solenoid SIS45V
20	239.2024	Plug (incl. seal ring) HB0
30	219.2001	Plug A (grey)
35	219.2002	Plug B (black)
40	058.4215	Cover
50	249.2000	Socket head cap screw M5x60
60	246.2116	Socket head cap screw M5x16 DIN 912
70	160.2093	O-ring ID 9,25x1,78

ACCESSORIES

 Threaded connection plates, Multi-flange subplates and
 Longitudinal stacking system see Register 2.9

Technical explanation see data sheet 1.0-100E